


Geberit Sigma70 actuator plate for dual flush, for Sigma concealed cistern 8 cm



Example image

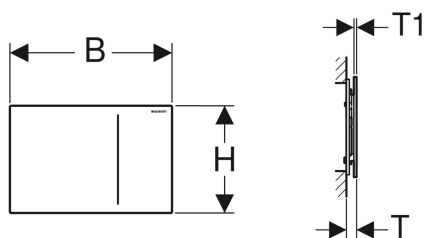

Application purposes

- For flush actuation with Sigma concealed cisterns 8 cm
- For flush actuation with high actuating convenience
- Not suitable for public and semipublic areas

Characteristics

- Front actuation

- Low-noise lifting mechanism
- Hydraulic servo lifter for minimum actuation forces
- Flush actuation pneumatic
- Can be installed without tools

Technical data

Flow pressure	1-6 bar
Actuation force	< 10 N

Scope of delivery

- Hydraulic servo lifter
- Water supply connection set
- Protection plate
- Mounting frame
- 2 distance bolts
- Installation accessories

Art. no.	Colour / surface	Material designation	B	H	T	T1	
115.625.SI.1	white / glass	Glass	24 cm	15.8 cm	1.1 cm	0.4 cm	
115.625.SJ.1	black / glass	Glass	24 cm	15.8 cm	1.1 cm	0.4 cm	
115.625.SQ.1	umber	Glass	24 cm	15.8 cm	1.1 cm	0.4 cm	➔
115.625.FW.1	brushed, easy-to-clean coated	Stainless steel	24 cm	15.8 cm	0.9 cm	0.2 cm	
115.625.00.1	customised	-	24 cm	15.8 cm	1.1 cm	0.4 cm	
115.625.JK.1	lava / glass	Glass	24 cm	15.8 cm	1.1 cm	0.4 cm	New
115.625.JL.1	sand grey / glass	Glass	24 cm	15.8 cm	1.1 cm	0.4 cm	New

➔ Phasing out

Accessories

- Geberit conversion set for hydraulic servo lifter, for Sigma concealed cistern 8 cm (up to year of manufacture 2015)



- From 01/04/2022, the accessory art. no. 245.473.00.1 will also be required for the installation of Geberit Sigma concealed cisterns 8 cm (with year of manufacture up to 2015)