


**Geberit remote flush actuation type 70, for dual flush, for Sigma concealed cistern 12 cm**

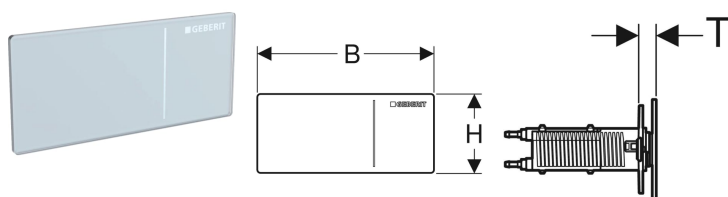

Example image

**Application purposes**

- For solid and drywall construction
- For covering thicknesses 5–50 mm in drywall construction
- For wall thicknesses of  $\geq 75$  mm in solid construction
- For tiled floor constructions of 5–40 mm
- For pneumatic remote flush actuation of Geberit concealed cisterns
- For Geberit Sigma concealed cisterns 12 cm
- For flush actuation with high actuating convenience
- Not suitable for public and semipublic areas

**Characteristics**

- Low-noise lifting mechanism
- Hydraulic servo lifter for minimum actuation forces
- Flush actuation pneumatic
- Can be combined with Geberit cover plates Sigma

**Technical data**

Flow pressure	1-6 bar
Actuation force	< 10 N

**Scope of delivery**

- Hydraulic servo lifter
- Water supply connection set
- Pneumatic hose, length 2 m
- Flush-mounting box with protection cover
- Conduit pipe, length 1.7 m
- Installation accessories
- Fastening material

Art. no.	Colour / surface	Material designation	B	H	T
115.630.SI.1	white	Glass	11.2 cm	5 cm	0.9 cm
115.630.SJ.1	black	Glass	11.2 cm	5 cm	0.9 cm
115.630.FW.1	brushed, easy-to-clean coated	Stainless steel	11.2 cm	5 cm	0.9 cm